



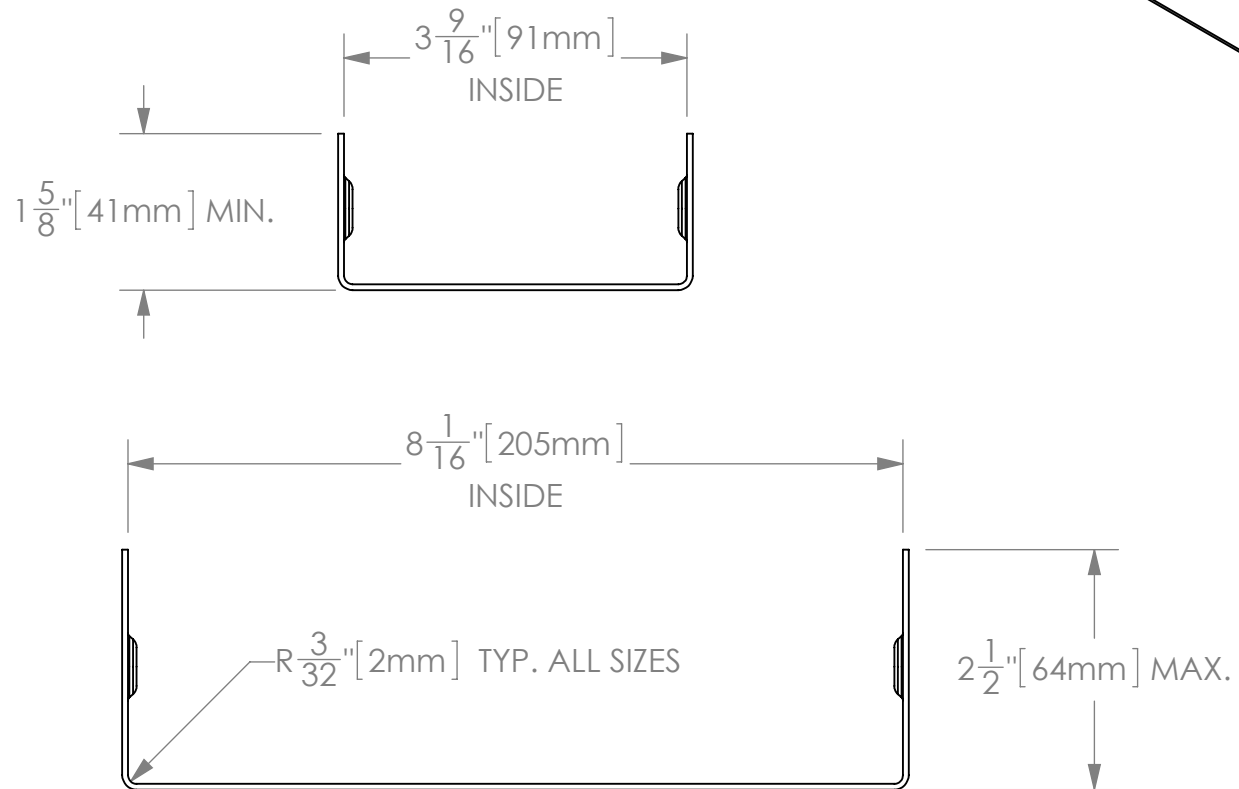

## KFS-1622 TRACKS

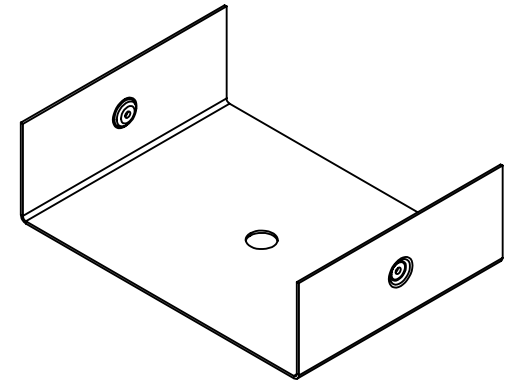

SIX WIDTHS: 8-1/16", 6-1/16", 5-9/16", 4-1/16", 3-11/16" & 3-9/16"  
FLANGE HEIGHTS: 2-1/2" MAXIMUM TO 1-5/8" RECOMENDED MINIMUM  
MATERIAL THICKNESS: 16 ga - 22 ga [1.5mm - 0.9mm]