



knudsonmfg.com

Toll Free: 1-800-548-2622

Phone: 1-303-469-2101


KR-24

1.5" STANDING SEAM ROOFING PANEL MACHINE



*GAUGES 26-22 ARE RECOMMENDED
IF RUNNING STEEL.
CONTACT US IF ADDITIONAL
GAUGES ARE DESIRED.

PROFILE: KR-24 1-1/2" STANDING SEAM PANEL MACHINE

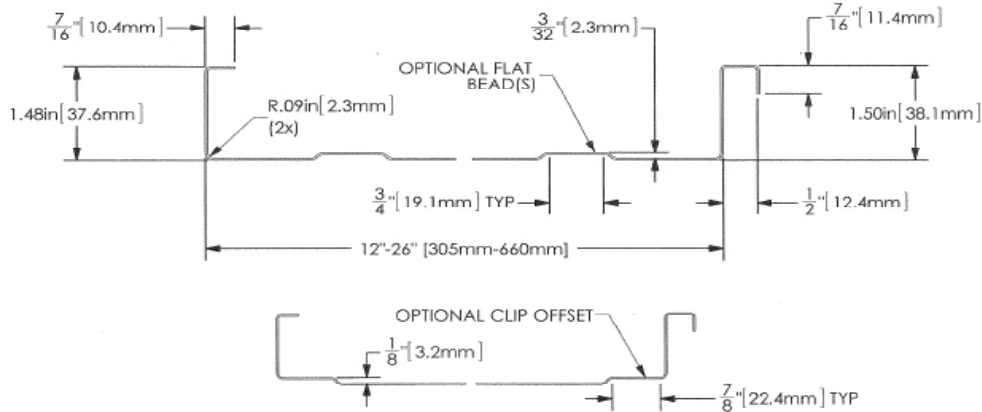

KR-24 MATERIAL SPECIFICATIONS

COIL WIDTH	24 INCHES / 610 MILLIMETERS		
MATERIAL	STEEL	ALUMINUM	COPPER
COIL THICKNESS	.018" - .032" (.46mm - .81mm)	0.24" - .032" (.61mm - .81mm)	20 oz - 16 oz
MAXIMUM YIELD	50 KSI	33 KSI	33 KSI
COATING	PAINT OR GALVANIZED	PAINT OR MILL FINISH	N/A

THE 1.5-INCH (38 MM) STANDING SEAM PANEL MACHINE INCLUDES:

- Max Speed: 100 Feet Per Minute.
- Compact Main Forming Rollers.
- Easy Changeover.
- Touch Screen Digital Controller.
- UL 90-Certified 1.5-Inch Standing Seam.
- Choice of Gas Engine or Electric Motor.
- Optional Oiler Kit.
- Optional Run-Out Table.

ACCESSORIES: THE 1.5-INCH (38-MM) STANDING SEAM PANEL MACHINE

- Optional 1/2-Inch-Head Mechanical Hand Crimper.
- Optional US-9 Electric Seamer.

Seamer Options:

- Either [120 V / 60 Hz] or [220 V / 50 Hz].
- Single Lock Mechanical Seam
[90° 1.0" to 1.5" (1/2") Head]
- Double Lock Mechanical Seam
[180° 1.0" to 1.5" (1/2") Head]
- Double to Single Conversion Kit (180° → 90°)
- Single to Double Conversion Kit (90° → 180°)

THERE'S ONLY ONE KNUDSON. QUALITY. DEPENDABILITY. OVER 60 YEARS IN BUSINESS.